


Award Low-Level

Versatile, economical and easy to assemble. Award Low-Level gives you a tried and tested bespoke solution that works equally well in wet or dry environments. Plus, it comes in our complete range of 34 laminate finishes.



The fittings for Award Low-Level come in either Light Grey ABS or Light Grey powder coated aluminium.



Access our cubicles in an emergency without the need to remove the door or cause damage to the lock. Watch the video on our YouTube channel.

01 Set back pedestal for floating appearance.

02 ABS indicator bolt fascia in Light Grey.

See p26-27 for Award Low-Level technical specifications.




Key features

- 2 door height options
- Anti-finger trap hinges
- Emergency release indicator bolts
- 34 laminate colour options
- Suitable for wet and dry environments
- Simple installation
- Economical


Main image

Award Low-Level cubicles in Pacific, Hydrangea, Peacock, Teal and Cloud with Vepps WC panelling in Cloud and Porcelain. HPL K2 profile vanity unit in Shadow and Cloud with a Sandringham 21 500 semi-recessed basin and a SanCeram basin mounted self-closing mixer tap. SGL perimeter bench in Teal and light grey coat hooks.

Technical Specifying Award Low-Level

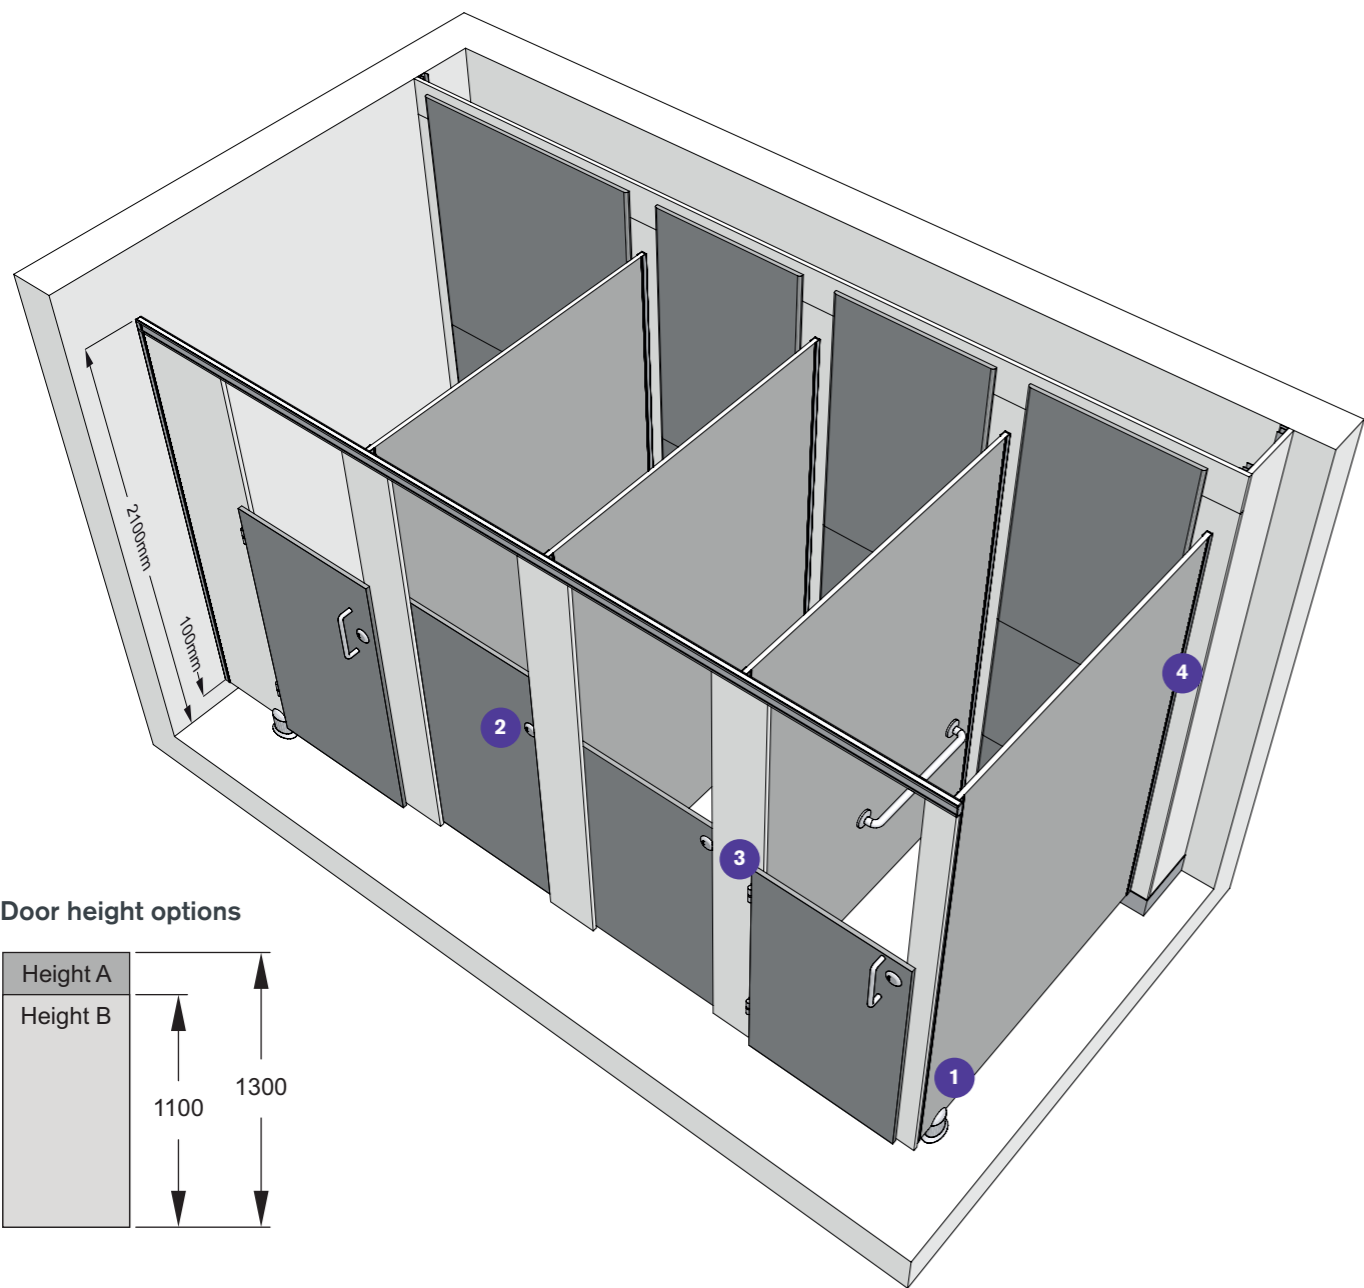

Door height options



Dimensions

Overall height	2100mm
Door height options	
Height A	1300mm
Height B	1100mm
Maximum depth	
MFC	2097mm
HPL	2067mm
SGL	1921mm
Floor clearance	100mm

For standard height option see p56.

Performance

Available in three material options, Award Low-Level is suitable for every type of wet or dry environment, allowing you to specify the most appropriate option to meet site requirements and your budget.

MFC
For dry environments with low risk of vandalism. Panels are manufactured from 19mm nominal thickness high performance moisture-resistant melamine faced chipboard. Edges lipped ABS.

HPL
For more heavily used washrooms, panels are heat, scratch and impact resistant. Manufactured from moisture-resistant chipboard faced with high pressure laminate, panels are 19mm nominal thickness. Edges lipped ABS.

SGL
Solid grade laminate is extremely resistant to impact and all surfaces are impervious to water. Panels are 13mm nominal thickness with polished black radiused edges.

Detailing

Panels and doors
Available in MFC, HPL and SGL.

Colour finish
MFC, HPL and SGL
34 colours from the standard range.

Cubicle hardware
Light Grey ABS or satin anodised effect powder coated zinc.

Edge treatment
MFC and HPL
Matching ABS lipping.
SGL
Polished black radiused edge.

Headrail
Rigid satin anodised aluminium headrail with matching end cap.

Cubicle hardware
Indicator bolt
Easy grip indicator bolt with emergency release facility and concealed fixings.
Hinge
Anti-finger trap satin anodised aluminium rise and fall butt hinge. Outward opening hinge option available.
Pedestal
Height adjustable for uneven floors, with concealed fixings. Where possible, pedestals are fixed to partitions.

Fixing
Partition to wall: Continuous satin anodised aluminium u-channel.
Pilaster to partition: Continuous satin anodised aluminium u-channel.
Pilaster to wall: Continuous satin anodised aluminium u-channel.

Accessories
Coat hooks and toilet roll holders available.