



Technical Specifying Lollipop

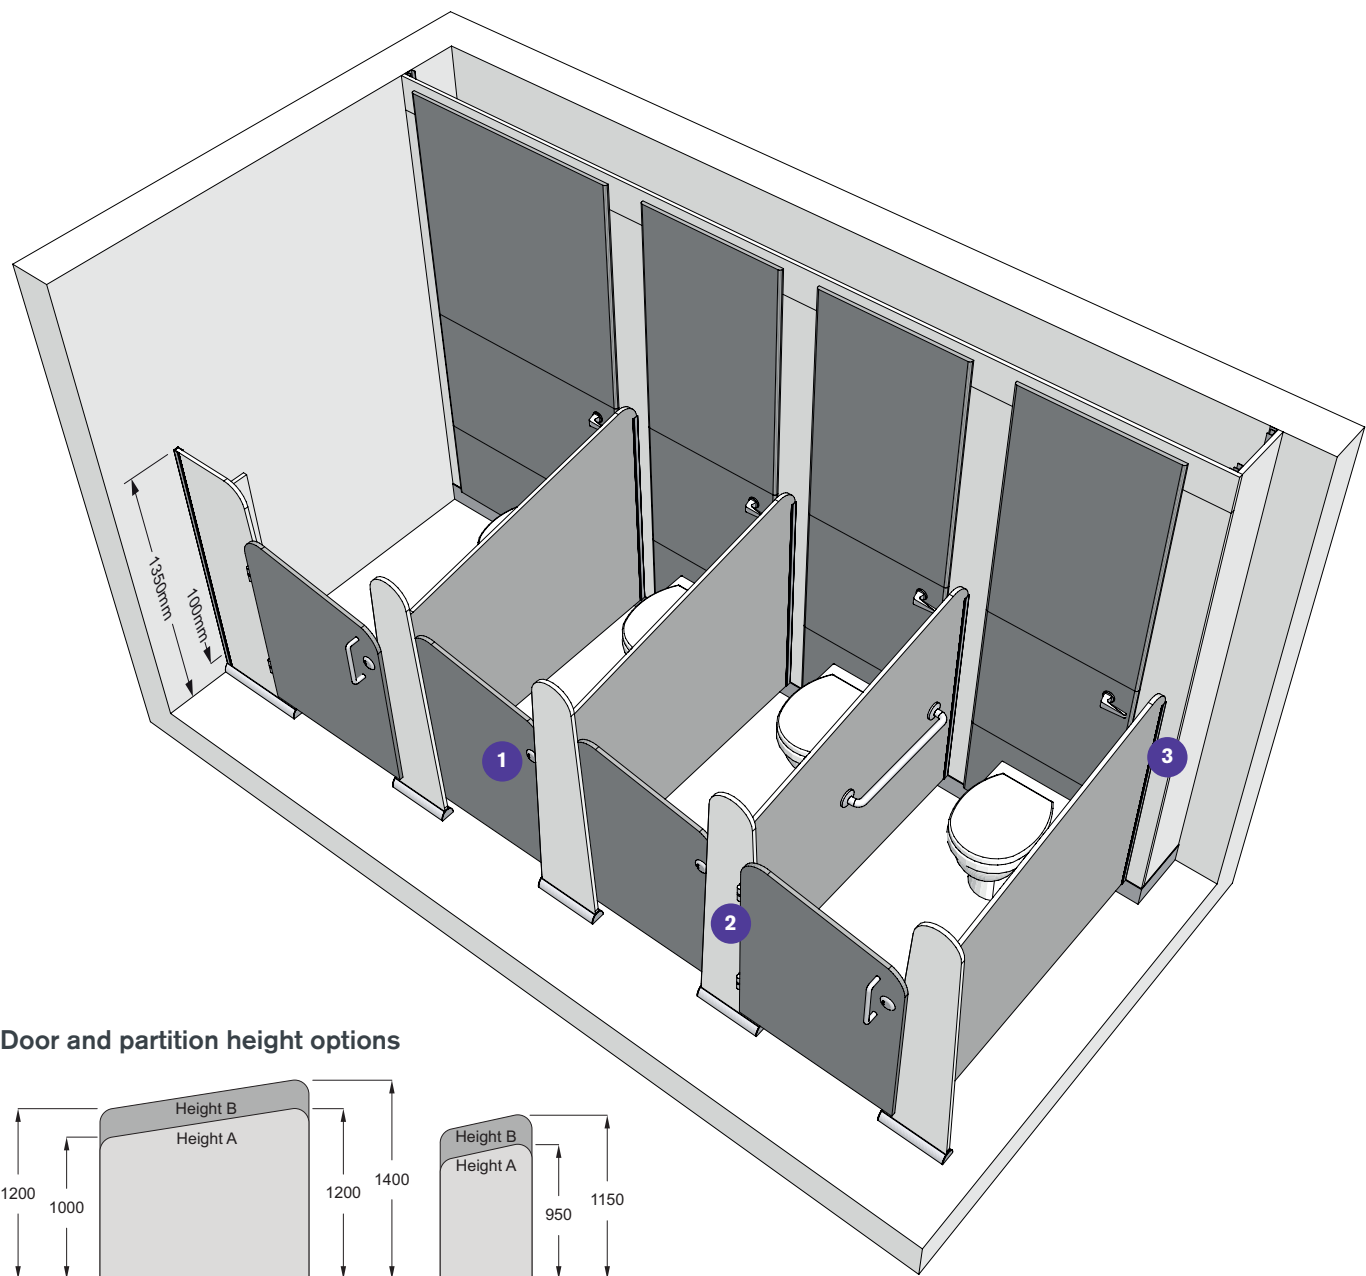

Door and partition height options

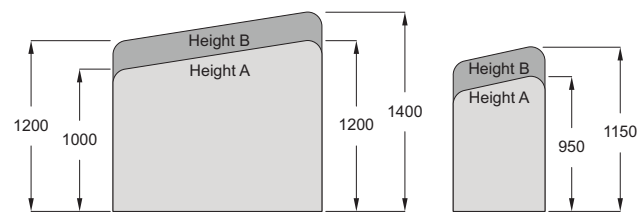

Dimensions

- Height option A**
Doors: 1050mm to highest point from floor level.
Partitions: 1300mm to highest point from floor level.
- Height option B**
Doors: 1250mm to highest point from floor level.
Partitions: 1500mm to highest point from floor level.
- Pilaster height**
1350mm from floor level.
- Maximum depth**
MFC 1500mm
HPL 1500mm
SGL 1500mm
- Floor clearance**
100mm

Vanities

A complementary Lollipop vanity unit with shaped under panels is available.
Lollipop vanities available in 600mm high K2 profile.

Performance

- Available in three material options, Lollipop is suitable for every type of wet or dry environment, allowing you to specify the most appropriate option to meet the site requirements and your budget.
- MFC**
For dry environments with low risk of vandalism. Panels are manufactured from 19mm nominal thickness high performance moisture-resistant melamine faced chipboard. Edges lipped with ABS.
- HPL**
For more heavily used washrooms, panels are heat, scratch and impact resistant. Manufactured from moisture-resistant chipboard faced with high pressure laminate, panels are 19mm nominal thickness. Edges lipped with ABS.

SGL
Solid grade laminate is extremely resistant to impact and all surfaces are impervious to water. Panels are 13mm nominal thickness with polished black radiused edges.

Detailing

- Panels and doors**
Available in MFC, HPL and SGL.
- Colour finish**
MFC, HPL and SGL
34 colours from the standard range.
- Cubicle hardware**
Light Grey ABS and satin anodised aluminium.
- Edge treatment**
MFC and HPL
Matching ABS lipping.
SGL
Polished black radiused edge.
- Pilaster support system**
Steel vertical support post fitted to rear face of pilaster and concealed within satin anodised extruded U-channel.
- Cubicle hardware**
Indicator bolt
Light Grey ABS easy grip indicator bolt with emergency release facility and concealed fixings. Magnetic catch option in lieu of indicator bolts.
Hinge
Satin anodised aluminium rise and fall anti-finger trap safety hinge.
Pedestal
Pilasters taken to floor and fitted in an extruded aluminium U-channel.
Fixings
Partition to wall: Continuous satin anodised aluminium U-channel.
Pilaster to partition: Continuous satin anodised aluminium U-channel.
Pilaster to wall fixing: Continuous satin anodised aluminium U-channel.
- Accessories**
Coat hooks and toilet roll holders available.