



Technical Specifying Mirror Box Units



Width options

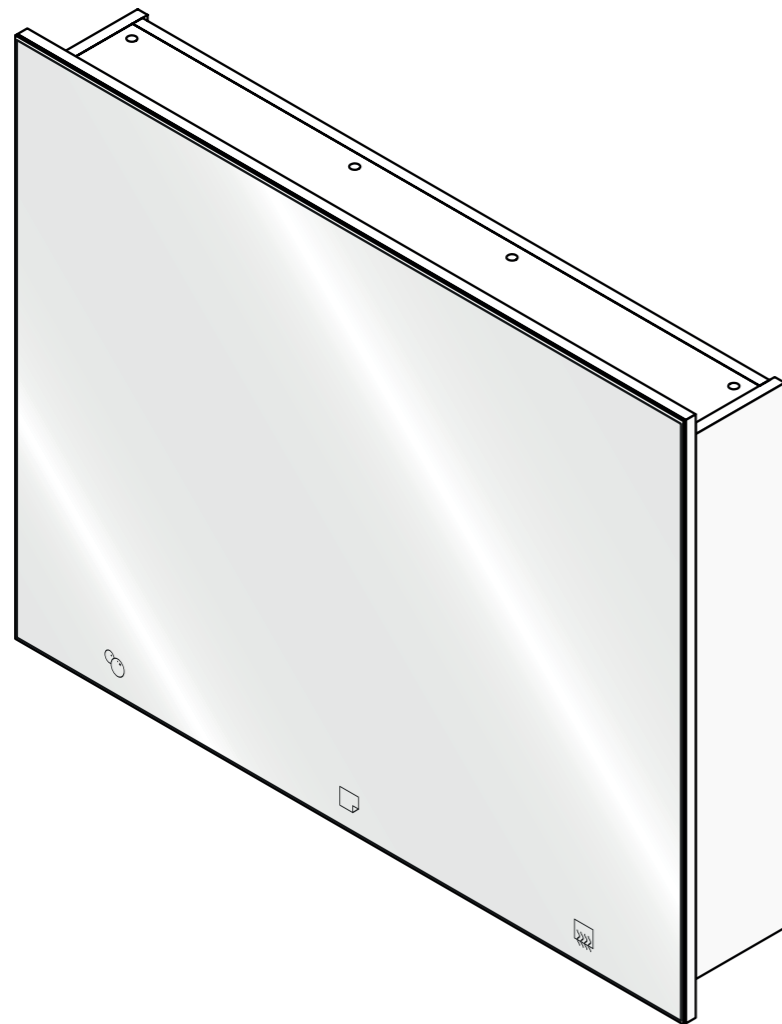

Activity space

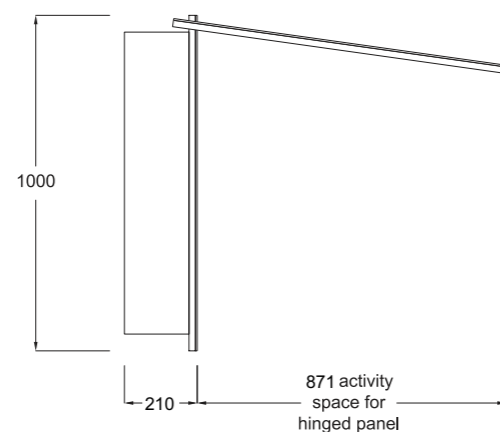

Dimensions

Height

1000mm

Width

Available in 5mm increments from 500mm up to a maximum of 1300mm

Depth

210mm

Mounting spaces

From 2 up to 12 mounting spaces

Hinged panel

871mm activity space

Performance

HPL

Mirror Box Unit carcass manufactured from 19mm nominal thickness moisture resistant High Pressure Laminate (HPL). Edges lipped with ABS.

SGL

Mirror door and decorative end panels manufactured from 12.5mm nominal thickness Solid Grade Laminate.

Glass

4mm thick silver safety back mirror with polished edges.

Detailing

Carcass

High performance moisture-resistant High Pressure Laminate.

Colour finish

Carcass

Porcelain.

Glass

Silver back mirror.

Edge treatment

HPL

Matching 0.8mm ABS lipping.

SGL

Polished black radiused edge.

Glass

Polished edges.

Hardware

Hinges

Door fitted with gas strut hinges.

Lock

Mounted plunge lock.

Lighting

Supplied with cool white 6000k LED lighting as standard, or optional 4000k RGBW LED lighting in 16 million colour variations. These are fitted flush into a rebate on rear of the door, providing a bright back-lit halo around the unit, or as front facing vanity lighting. Installed using waterproof IP67 rated connectors, with average lifespan of 50,000 hours.

Fixings

Supplied with Z-hangers for wall/panel fixings. Fixing kit for hard wall installations. Other wall or board types will require a suitable fixing kit.

Accessories*

Water dispenser

Automatic hand sensor, available with or without hot and cold blending valve. Pressure-tested with a visible outlet for easy positioning. Requires 100mm of space.

Liquid soap dispenser

Mains powered as standard, automatic hand sensor. 1L liquid soap capacity equivalent to 1,600 dispenses. Requires 100mm of space.

Hand sanitiser dispenser

Mains powered as standard, automatic hand sensor. 1L hand sanitiser capacity equivalent to 1,600 dispenses. Requires 100mm of space.

Hand dryer

Automatic hand sensor, 75 dBA noise rating, 85 m/s capacity, 900W motor, mains feed required into rear of unit. Requires 300mm of space.

Paper towel dispenser

Suitable for most standard multi-fold paper towels, capable of holding three stacks of paper towels. Top loading by access inside cabinet. Requires 300mm of space.

*All accessory icon indicators available as standard or with optional etching.