
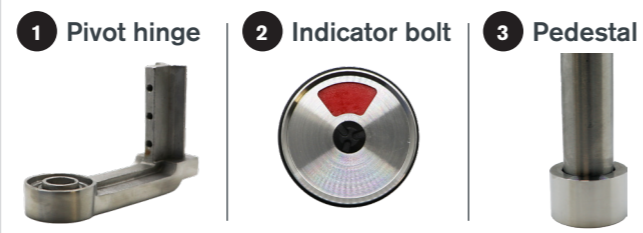


## Technical Specifying Sahara Glass

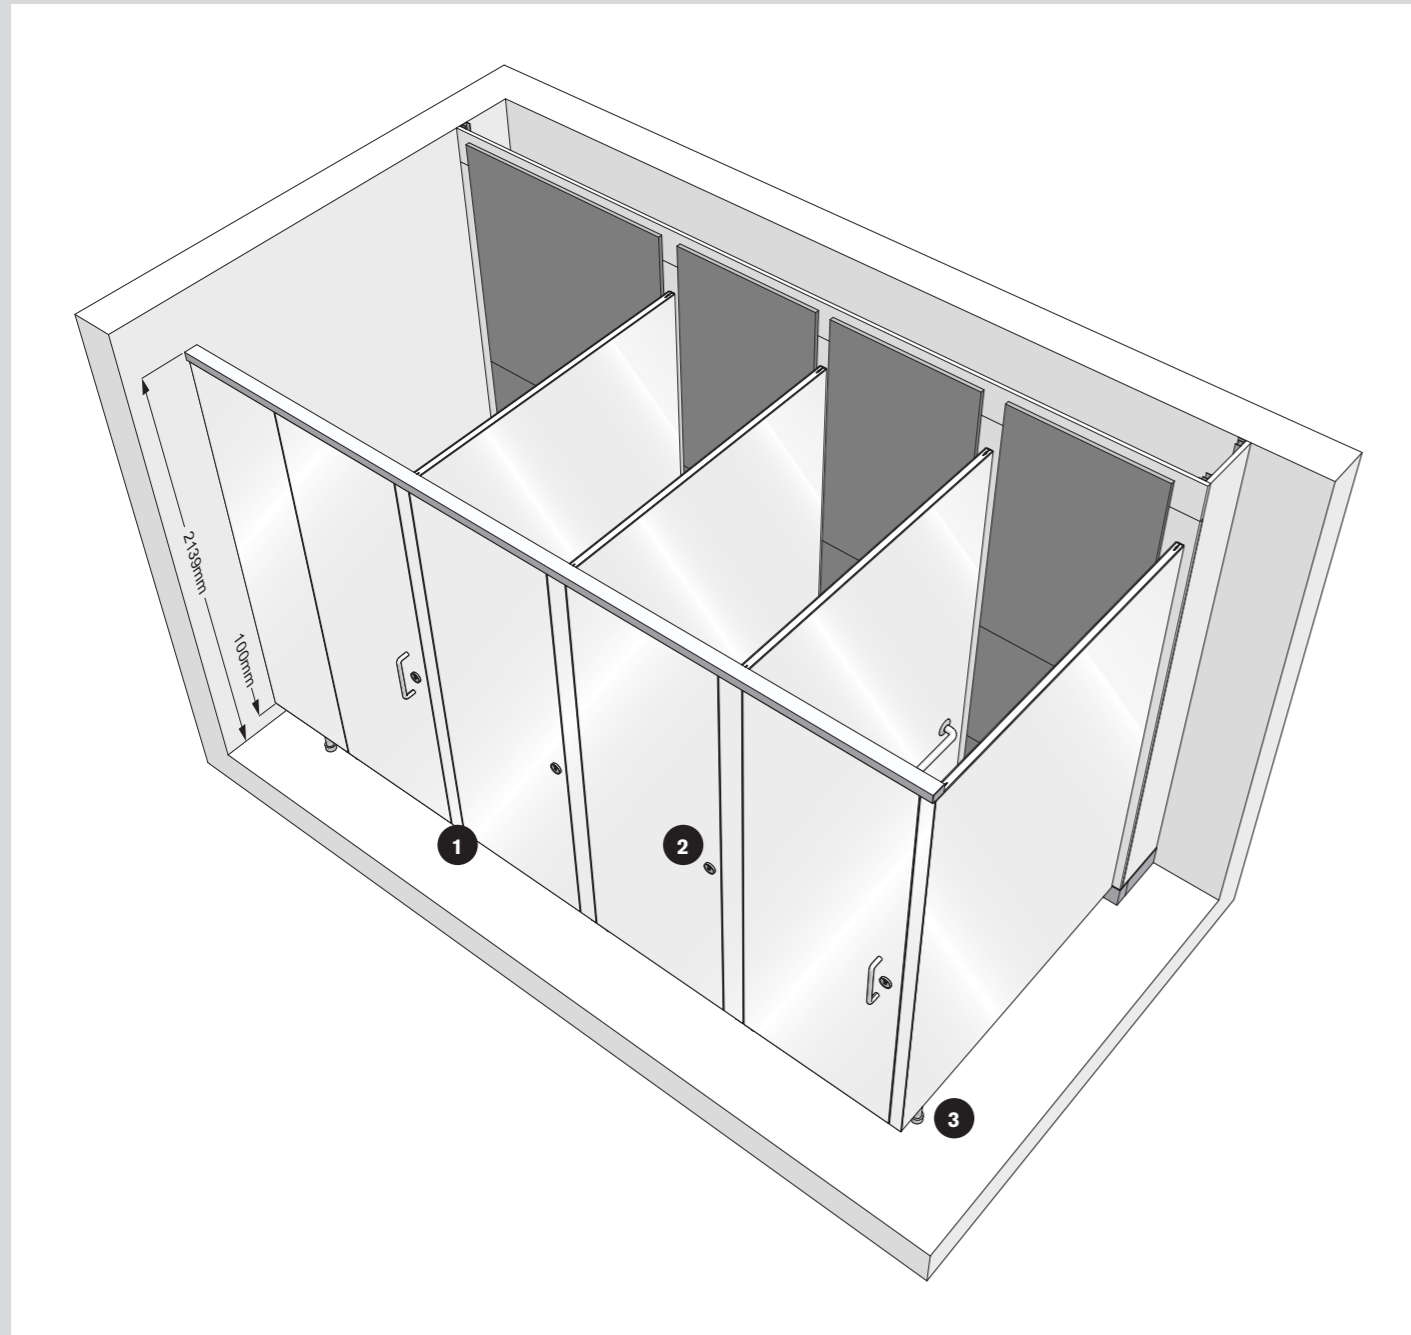

### Dimensions

**Overall height**

2139mm

**Maximum height**

2909mm

**Maximum depth**

2086mm

**Floor clearance**

100mm as standard (also a choice of 50mm or 150mm)

**Minimum ceiling clearance**

20mm

### Performance

**Glass**

4mm toughened double back painted safety glass available in timeless black or white.

Doors are 44mm nominal thickness high performance Medium Density Fibreboard (MDF) clad with double back painted safety glass. Partitions are 35mm nominal thickness clad with double back painted safety glass.

### Detailing

**Panels and doors**

High performance Medium Density Fibreboard core clad in 4mm toughened double back painted safety glass.

**Colour finish**
**Glass**

Black or white.\*

**Core**

Noir or Porcelain.

**Cubicle hardware**

Satin anodised aluminium, stainless steel and powder coated aluminium.

\*Other colours available upon request.

**Edge treatment**
**Glass**

Polished.

**Core**

Lipped with 0.5mm matching ABS.

**Pilasters**

High strength, slimline extruded satin anodised aluminium pilasters clad in glass, specially designed to conceal fixings.

**Headrail**

40mm slimline powder coated aluminium in black or white with matching end cap.

**Cubicle hardware**
**Indicator bolt**

Stainless steel indicator bolt with slimline mortice lock and unique emergency release function.

**Hinge**

Stainless steel soft self-closing pilaster mounted pivot hinges, supplied as an assembly.

**Pedestal**

Stainless steel 100mm height adjustable (+10mm) as standard. Also a choice of 50mm or 150mm height pedestals.

**Fixings**

Partition to wall: Satin anodised aluminium T-section.

Pilaster to partition: Satin anodised aluminium T-section.

Pilaster to wall: Satin anodised aluminium channel and Z-clip.

**Accessories**

Coat hooks and toilet roll holders available.